

LEVEL CONVERTERS



Innovation Lives in ADFweb.com

- 1) M-Bus to RS232 (code order: HD67021M serie)
- 2) M-Bus to Modem (code order: HD67023-B2 serie)
- 3) M-Bus to USB (code order: HD67024-B2 serie)
- 4) M-Bus to Ethernet (code order: HD67030-B2 serie)
- 5) M-Bus to RS485 (code order: HD67022M serie)



ADFweb.com srl
Strada Nuova, 17
31010 Marenco di Piave
Treviso — ITALY
www.adfweb.com

Tel. +39-0438-30.91.31
Fax +39-0438-49.20.99
Id. Tax IT-0385360262
info@adfweb.com




LEVEL CONVERTERS - M-Bus

- European standard EN 1434
- Microprocessor control
- Scalable from 1 to 250 slaves
- Galvanic isolation between RS232 and M-Bus
- 35mm DIN rail mounting
- Transmission rate settable from 300 to 38400 baud
- AC/DC Supply

M-Bus to RS232

Code order: HD67021M serie

QR (matrix code info)
Download M-Bus/RS232

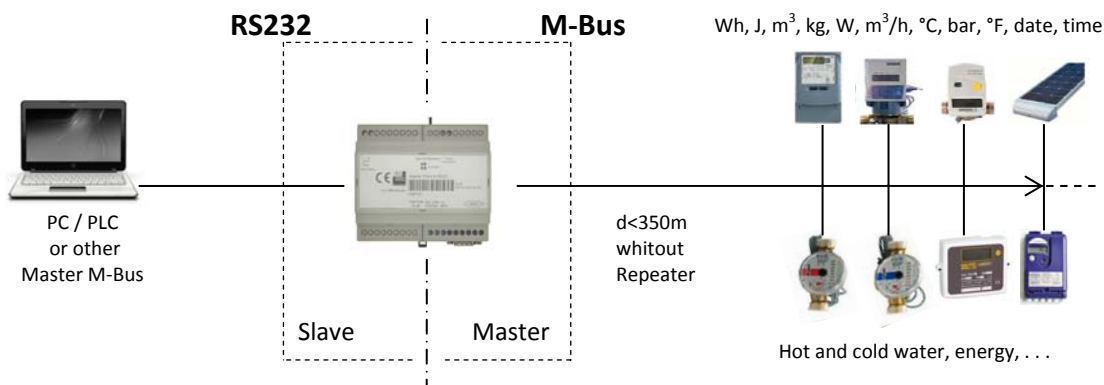

Ask an expert:
info@adfweb.com




The level converter connects M-Bus devices, such as counters of hot and cold water, Energy, etc. ..., to allow they to be read from PC/PLC through a standard RS232 COM port.

- European standard EN 1434
- Microprocessor control
- Scalable from 1 to 250 slaves
- 35mm DIN rail mounting
- Transmission rate settable from 300 to 38400 baud
- AC/DC Supply

M-Bus to Modem

Code order: HD67023-B2 serie

QR (matrix code info)
Download M-Bus/Modem

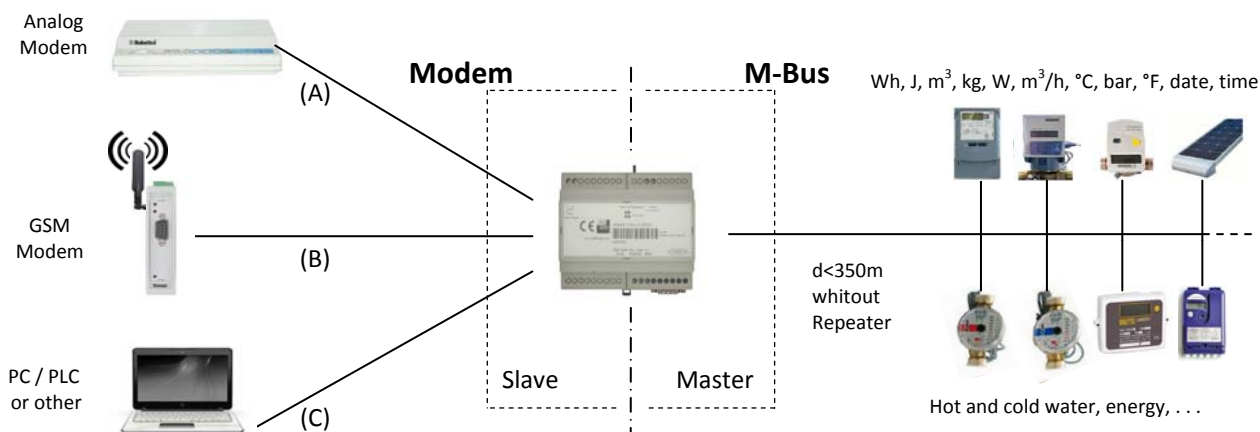

Ask an expert:
info@adfweb.com



Converter of level that allows to communicate with the M-Bus slaves remotely (telereading), using or a simple Analog Modem or a GSM Modem (like our HD670300).

The M-Bus is able to powering from up to 250 slaves.



ADFweb.com srl
Strada Nuova, 17
31010 Maren di Piave
Treviso — ITALY
www.adfweb.com

Tel. +39-0438-30.91.31
Fax +39-0438-49.20.99
Id. Tax IT-0385360262
info@adfweb.com

QR—quick response
(matrix code)



info M-Bus Level Converter




LEVEL CONVERTERS - M-Bus

- European standard EN 1434
- Microprocessor control
- Scalable from 1 to 250 slaves
- Galvanic isolation between USB and M-Bus
- 35mm DIN rail mounting
- Transmission rate settable from 300 to 38400 baud
- AC/DC Supply

M-Bus to USB

Code order: HD67024-B2 serie

QR (matrix code info)
Download M-Bus / USB

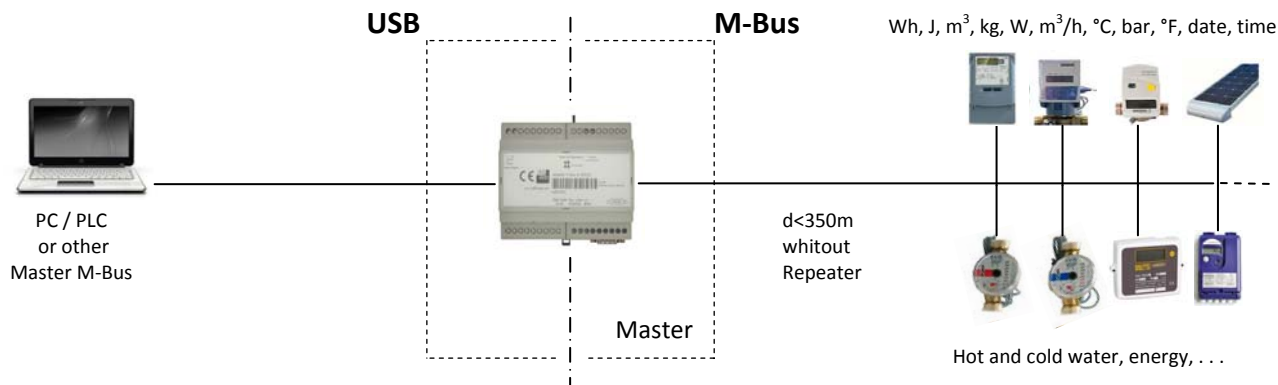

Ask an expert:
info@adfweb.com




Converter of level that allows to communicate with the M-Bus slaves using a PC or other system equipped with USB port.
The M-Bus is able to powering from up to 250 slaves.

- European standard EN 1434
- Microprocessor control
- Scalable from 1 to 250 slaves
- Galvanic isolation between Ethernet and M-Bus
- 35mm DIN rail mounting
- Transmission rate settable from 300 to 38400 baud
- AC/DC Supply

M-Bus to Ethernet

Code order: HD67030-B2 serie

QR (matrix code info)
Download M-Bus / Ethernet

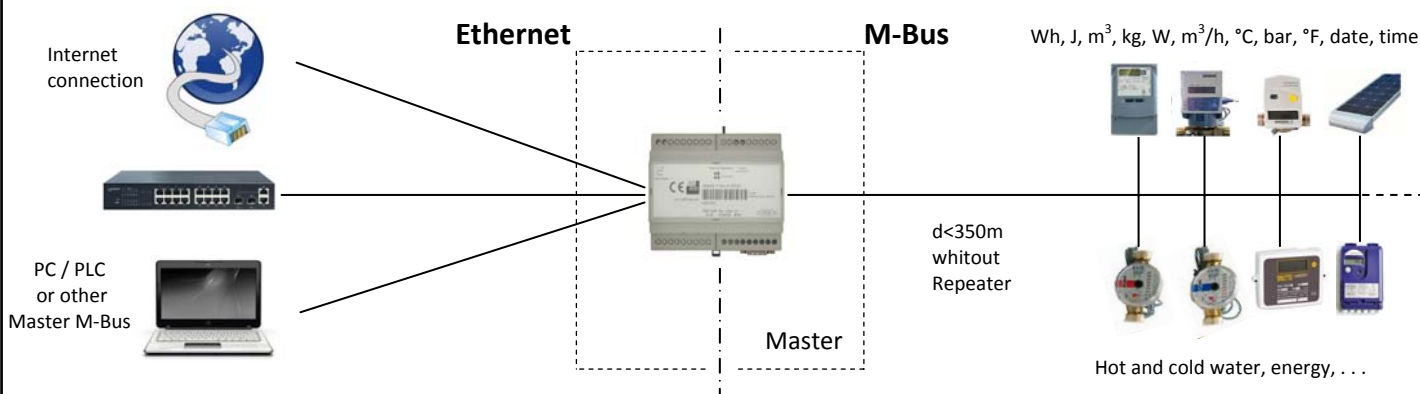

Ask an expert:
info@adfweb.com



Converter of level that allows to communicate with the M-Bus slaves, locally or remotely (through Internet) using an Ethernet connection.
The M-Bus is able to powering from up to 250 slaves.



ADFweb.com srl
Strada Nuova, 17
31010 Mareno di Piave
Treviso — ITALY
www.adfweb.com

Tel. +39-0438-30.91.31
Fax +39-0438-49.20.99
Id. Tax IT-0385360262
info@adfweb.com

QR—quick response
(matrix code)



info M-Bus Level Converter




LEVEL CONVERTERS - M-Bus

- European standard EN 1434
- Microprocessor control
- Scalable from 1 to 250 slaves
- Galvanic isolation between RS485 and M-Bus
- 35mm DIN rail mounting
- Transmission rate settable from 300 to 38400 baud
- AC/DC Supply

M-Bus to RS485

Code order: HD67022M serie

QR (matrix code info)
Download M-Bus /RS485

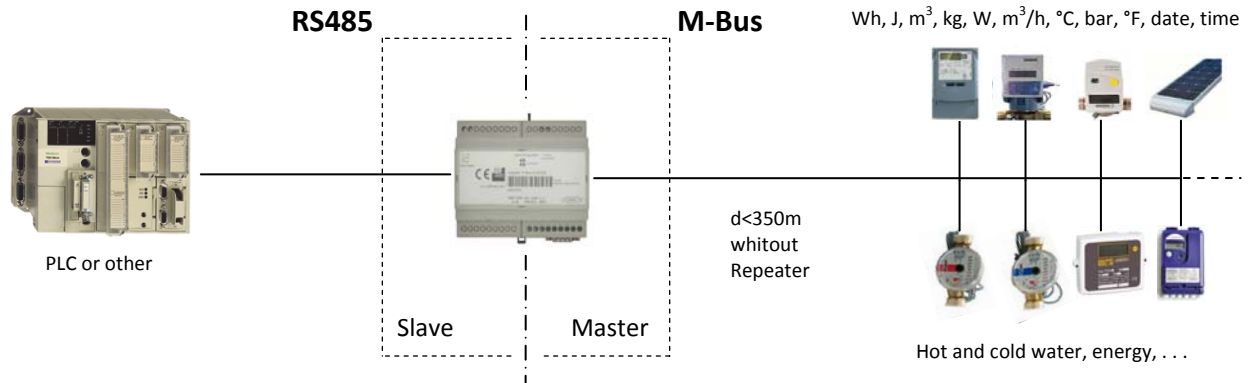

Ask an expert:
info@adfweb.com



The level converter connects M-Bus devices, such as counters of hot and cold water, Energy, etc. ..., to allow they to be read from PC/PLC through a standard RS485 COM port.



ADFweb.com srl
Strada Nuova, 17
31010 Marenco di Piave
Treviso — ITALY

www.adfweb.com

Tel. +39-0438-30.91.31
Fax +39-0438-49.20.99
Id. Tax IT- 0385360262

info@adfweb.com

QR—quick response
(matrix code)



info M-Bus Level Converter

