


Multi-drop RS232 to Fiber Optic Single Loop

CONNECTION SCHEME

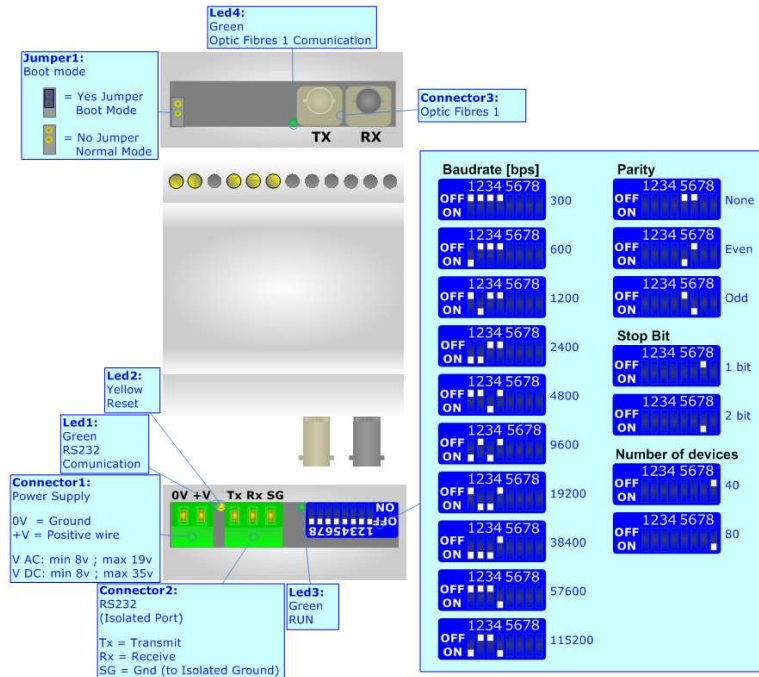

DIP SETTINGS:

Speed [bps]	Dip 1	Dip 2	Dip 3	Dip 4
300	OFF	OFF	OFF	OFF
600	ON	OFF	OFF	OFF
1200	OFF	ON	OFF	OFF
2400	ON	ON	OFF	OFF
4800	OFF	OFF	ON	OFF
9600	ON	OFF	ON	OFF
19200	OFF	ON	ON	OFF
38400	ON	ON	ON	OFF
57600	OFF	OFF	OFF	ON
115200	ON	OFF	OFF	ON

Parity	Dip 5	Dip 6
None	OFF	OFF
Odd	ON	OFF
Even	OFF	ON

Stop Bit	Dip 7
One	OFF
Two	ON

Max Dev. #	Dip 8
50	OFF
80*	ON

To obtain the complete manual go to :

<http://www.adfweb.com/download>

or

http://www.adfweb.com/download/filefold/MD_RS232_Fiber_Optic_SL_MN67033M_ENG.pdf

To obtain the new version of this box sheet pleas go to:

http://www.adfweb.com/download/filefold/BS67033M_ENG.pdf

ADFweb.com s.r.l.
 www.adfweb.com
 info@adfweb.com
 support@adfweb.com