

EXTERNAL LINKS

HD67235-A3



QR of Manual

[www.adfweb.com/download/
filefold/MN67235_ENG.pdf](http://www.adfweb.com/download/filefold/MN67235_ENG.pdf)



QR of Box-Sheet

[www.adfweb.com/download/
filefold/BS67235-A3_ENG.pdf](http://www.adfweb.com/download/filefold/BS67235-A3_ENG.pdf)



QR of Software

[www.adfweb.com/download/
filefold/SW67235.zip](http://www.adfweb.com/download/filefold/SW67235.zip)

HD67235-A3

BOX SHEET

DeviceNet Slave / CAN - Coverter

Box Sheet for Order code: HD67235-A3
Document code: BS67235-A3
V1.001



ADFweb.com srl
Strada Nuova, 17, IT-31010 Marenò di Piave, Treviso - Italy

www.ADFweb.com


CONNECTION SCHEME

Order code: HD67235-A3

Dip-Switch A:
-Dip1 – Must be at ON
-Dip2 – Functioning Mode


 = Normal  = Boot

Dip-Switch B:
-Dip1 – DeviceNet Termination Resistor

 = Open  = 120 Ohm

Connector3:
DeviceNet port (Isolated port)

1 = Shield* (to Isolated Ground)
2 = Not Connected
3 = Not Connected
4 = High wire
5 = Low wire




Dip-Switch B:
-Dip1 – CAN Termination Resistor

 = Open  = 120 Ohm

Connector2:
CAN port (Isolated port)

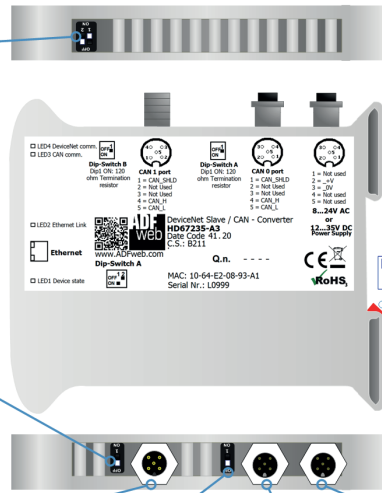

1 = Shield* (to Isolated Ground)
2 = Not Connected
3 = Not Connected
4 = High wire
5 = Low wire



Connector1:
Power Supply port

1,4,5 = Not Connected
2 = +V = Positive wire
3 = 0V = Ground

V AC: min 8V ; max 24V
V DC: min 12V ; max 35V



Led4:
Green
DeviceNet comm.

Led3:
Green
CAN comm.

Led2:
Green
Ethernet link

Connector5:
Ethernet Port
(RJ45 Plug)

Led1:
Green
Device state