



QR of Manual

[www.adfweb.com/download/
filefold/MN67607_ENG.pdf](http://www.adfweb.com/download/filefold/MN67607_ENG.pdf)



QR of Box-Sheet

[www.adfweb.com/download/
filefold/BS67607-A1_ENG.pdf](http://www.adfweb.com/download/filefold/BS67607-A1_ENG.pdf)



QR of Software

[www.adfweb.com/download/
filefold/SW67607.zip](http://www.adfweb.com/download/filefold/SW67607.zip)

HD67607-A1

BOX SHEET

PROFINET / CANopen - Converter

Box Sheet for Order code: HD67607-A1
Document code: BS67607-A1
V1.002



ADFweb.com srl

Strada Nuova, 17, IT-31010 Mareno di Piave, Treviso - Italy

www.ADFweb.com

CONNECTION SCHEME

Order code: HD67607-A1

Dip-Switch A:


-Dip1 - Functioning Mode



= Normal



= Boot

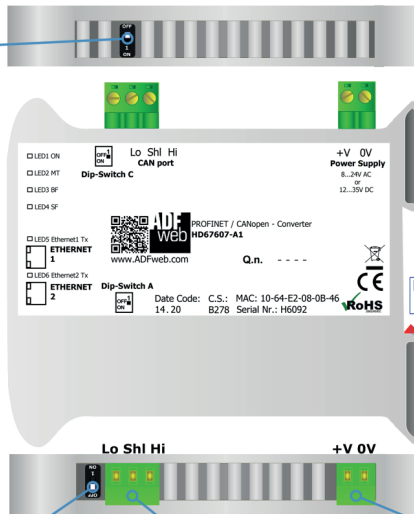

Led1:
Green
ON

Led2:
Yellow
MT

Led3:
Red
BF

Led4:
Red
SF

Connector3:
Ethernet1 Port
(RJ45 Plug)

Led6:
Green
Ethernet2 Tx

Connector4:
Ethernet2 Port
(RJ45 Plug)

Rail DIN
Clamp

Dip-Switch B:

-Dip1 - CAN Termination Resistor



= Open



= 120 Ohm

Connector2:

J1939 port (Isolated port)

Hi = High wire

Shl = Shield* (to Isolated Ground)

Lo = Low wire

Connector1:

Power Supply port

0V = Ground

+V = Positive wire

V AC: min 8V ; max 24V

V DC: min 12V ; max 35V

Order code: HD67607-A1